

ESTABLISHED IN INDUSTRIAL APPLICATIONS



LAYHER ALLROUND SCAFFOLDING® – THE "ORIGINAL"

// A SYSTEM WITHOUT LIMITS



Allround scaffolding uses a simple, unique and bolt-free connection technology. Sliding the wedge-head over the rosette and inserting the wedge into the opening immediately secures the component. There is still sufficient play to secure the other end of the ledger.




A hammer blow to the wedge transforms the loose connection into a strong structurally rigid one. The face of the wedge-head is now precisely positioned against the standard.



The result of superior design. Up to 8 connections can be made in the structurally ideal Allround connector on one level and at various angles. Connections are provided in standard dimensions of 50 cm on all Allround standards. The flat rosette prevents clogging with dirt of whatever type.



Ingenious connection technology. The four small punched-out openings in the rosette automatically centre the ledger at right angles – the four large openings allow the angle of alignment to be selected.

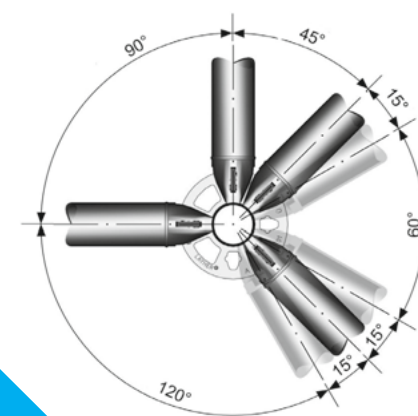

Ingenious technology for efficient working. Allround Scaffolding (hot-dip galvanized) is ideally suited to any industrial construction application.

High transference of forces, lightweight components. All wedge-head connections converge through one central point.
Approvals: Allround steel scaffolding Z-8.22-64 based on EN 12811. Allround aluminium scaffolding Z-8.22-64.1. Further international certifications available.

THE BENEFITS TO YOU

- ▶ Save time during assembly and dismantling thanks to bolt-free connection technology.
- ▶ Safer and simpler one-man assembly.
- ▶ No loose parts.
- ▶ Very little material required.
- ▶ Maintenance free and always ready for use.
- ▶ Low weight of individual parts.
- ▶ Tried and proven range of parts.
- ▶ Economic and versatile design that convinces.


Layher® 

More Possibilities. The Scaffolding System.

Wilhelm Layher GmbH & Co. KG
Scaffolding Grandstands Ladders

Ochsenbacher Strasse 56
D-74363 Gueglingen-Eibensbach
Germany

Post Box 40
D-74361 Gueglingen-Eibensbach
Germany
Telephone +49 (0) 71 35 70-0
Telefax +49 (0) 71 35 70-2 65
E-Mail: export@layher.com
www.layher.com



Layher® 

More Possibilities. The Scaffolding System.

LAYHER ALLROUND SCAFFOLDING® SAFETY IN INDUSTRIAL APPLICATIONS

// LAYHER ALLROUND SCAFFOLDING U-VERSION



Edition 06.2013
Ref. No. 8116.240

Quality management
certified according to
ISO 9001:2008
by German TÜV-CERT




THE LAYHER ALLROUND SCAFFOLDING®

SAFER WAY UP

PERFECT SOLUTIONS WITH ALLROUND SCAFFOLDING SYSTEM

GAPLESS DECKING

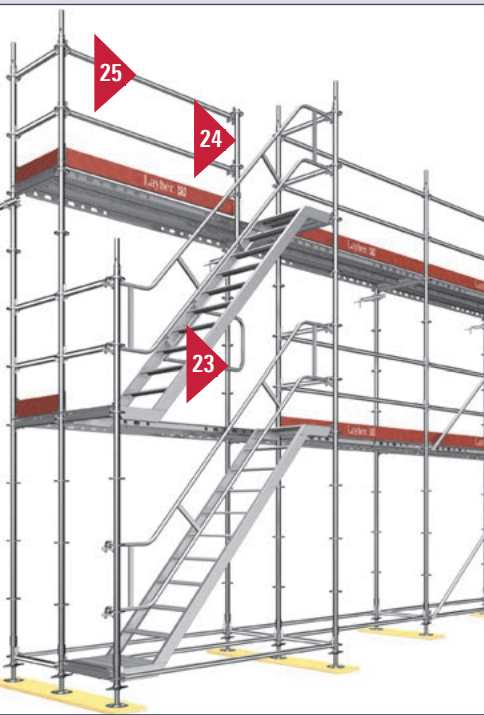

9

Access ladder

4005.007

10

U-access deck, aluminium

3851.xxx

11

U-access deck, aluminium, 1.0 m

3851.100

1

U-platform stairway, aluminium

1753.xxx

23

Stairwell guardrail

WS 19/22 1752.004/014

24

Stairway guardrail post

is used for the stairwell at the top level

2638.400

25

O-ledge with wedge-head and U-fork

is used for the stairwell at the top level

2638.40x

5

Pole ladder

aluminium steel

1004.xxx 1002.xxx

7

Swing door with aluminium toe board

0.73 m wide 2627.007 1.00 m wide 2627.006

2

Stairway guardrail

2638.xxx

Available with U-forks and swivelling wedge-heads

3

Internal stairway guardrail

1752.xxx

4

Stairway guardrail adaptor

2637.000

6


Guardrail standard 1.7 m, bended

2606.170

8

Ladder support for external access

0701.813

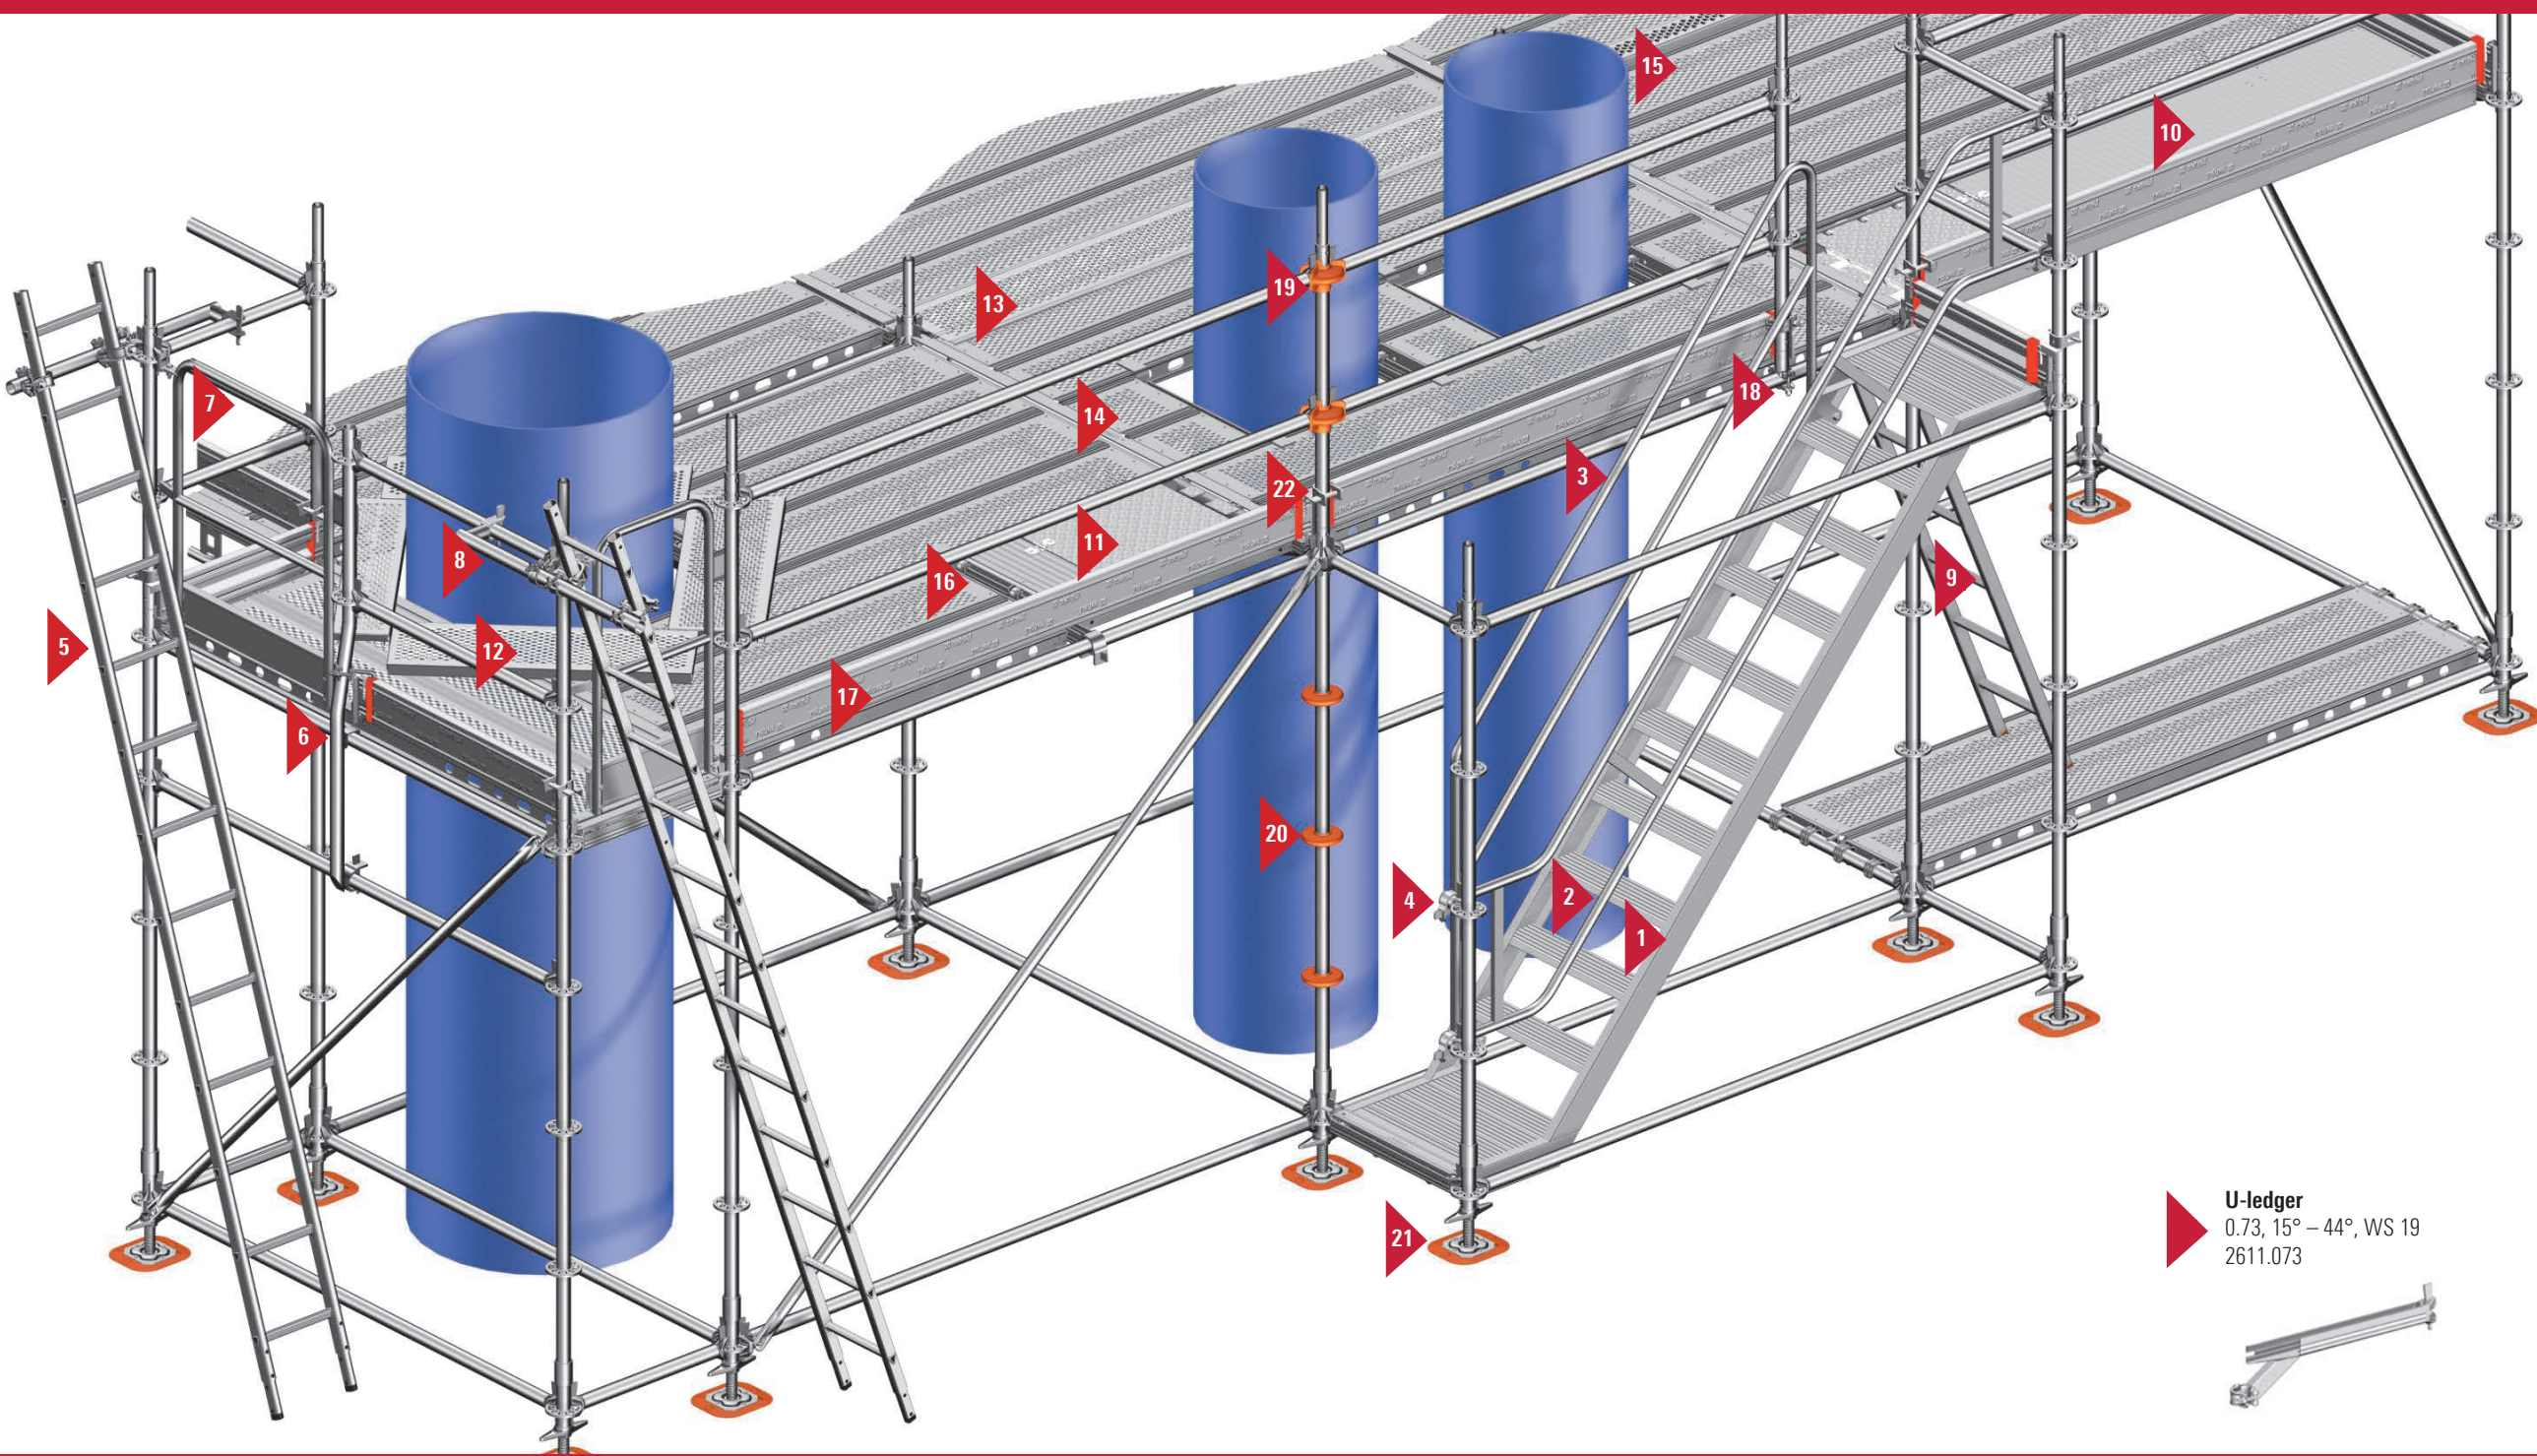

U-deck bearer

0727.784

U-corner deck

0727.621

U-ledge

0.73, 15° – 44°, WS 19

2611.073

12

Steel plank

0.2 m wide 3878.xxx 0.3 m wide 3880.xxx

13

Steel gap cover

0.32 m wide 3881.xxx

14

U-steel deck, 0.39 m long,

0.32 m wide 0726.974 0.19 m wide 0727.143

15

U-Gap deck, 0.11 m wide

0.73 – 3.07 m 2602.xxx

16

U-ledge

0.32/0.70/1.09 m steel deck-O-ledge 2614.xxx

Locking pin plastic

3800.001

Steel bolt self securing

3800.002

Securing bolt WS 19

3800.004

U-corner deck, steel

2630.040

U-corner deck, steel, adjustable, with toe board

3819.000

U-ledge with gap cover, 0.11 m wide

0.73 – 2.57 m 2609.xxx

O-board bearer

0.73 – 3.07 m 2615.xxx

U-aluminium deck, adjustable

1.57 – 2.57 m 3803.000

Guardrail, adjustable


1.09 – 1.57 m 2606.000 1.57 – 2.57 m 2606.001

U-corner deck

0712.xxx

U-ledge

0.32/0.70/1.09 m steel deck-O-ledge 2614.xxx

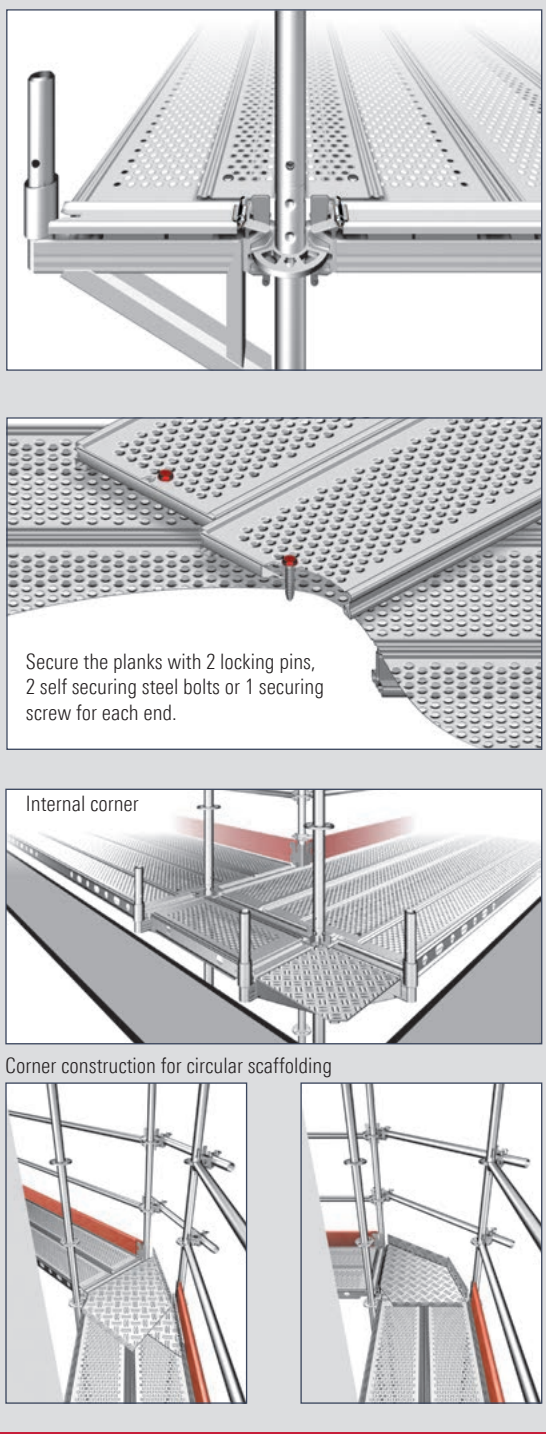

FURHTER INGENIOUS DETAIL SOLUTIONS

17

U-steel toe board

2649.xxx

18

Spigot with half coupler

WS 19/22 4706.019

19

Allround rosette cover

with connected ledger 4007.001

20

Allround rosette cover

without connected ledger 4007.002

21

Protective base for base plate

4007.004

22

Toe board support

0723.819

Half coupler with joint

0710.104

Clamp coupler

WS 19/22 4716.019/022

Clamp half coupler

WS 19/22 4750.019/022

Spigot for U-section

2656.000

Wedge-head coupler, swivelling

WS 19/22 2629.019/022

Rosette, clampable

WS 19/22 2602.019/022

Rosette, clampable with thread

WS 19/22 2602.119/122

Twin wedge coupler

2628.000

Half-coupler with toe board pin

WS 19/22 4708.019/022

Wedge-head coupler, rigid

WS 19/22 2628.019/022

Base plate, swivelling

4003.000

Scaffolding suspension for tension belt with tube

0724.241

Cover for coupler

4007.003

